

Fig. 1

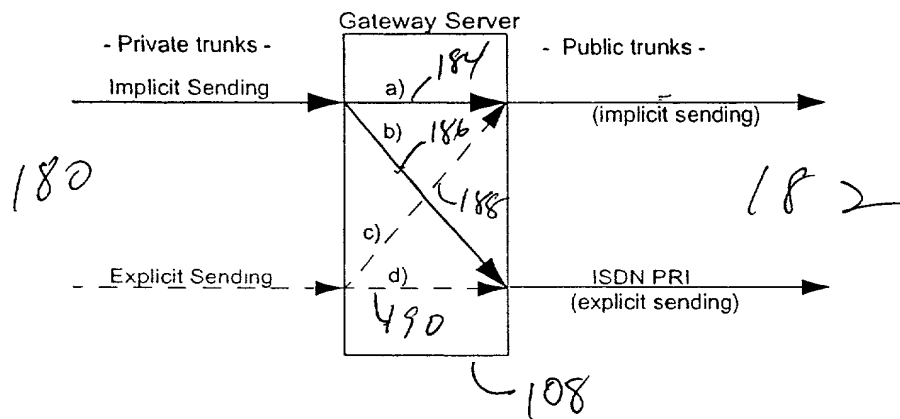


Fig. 3

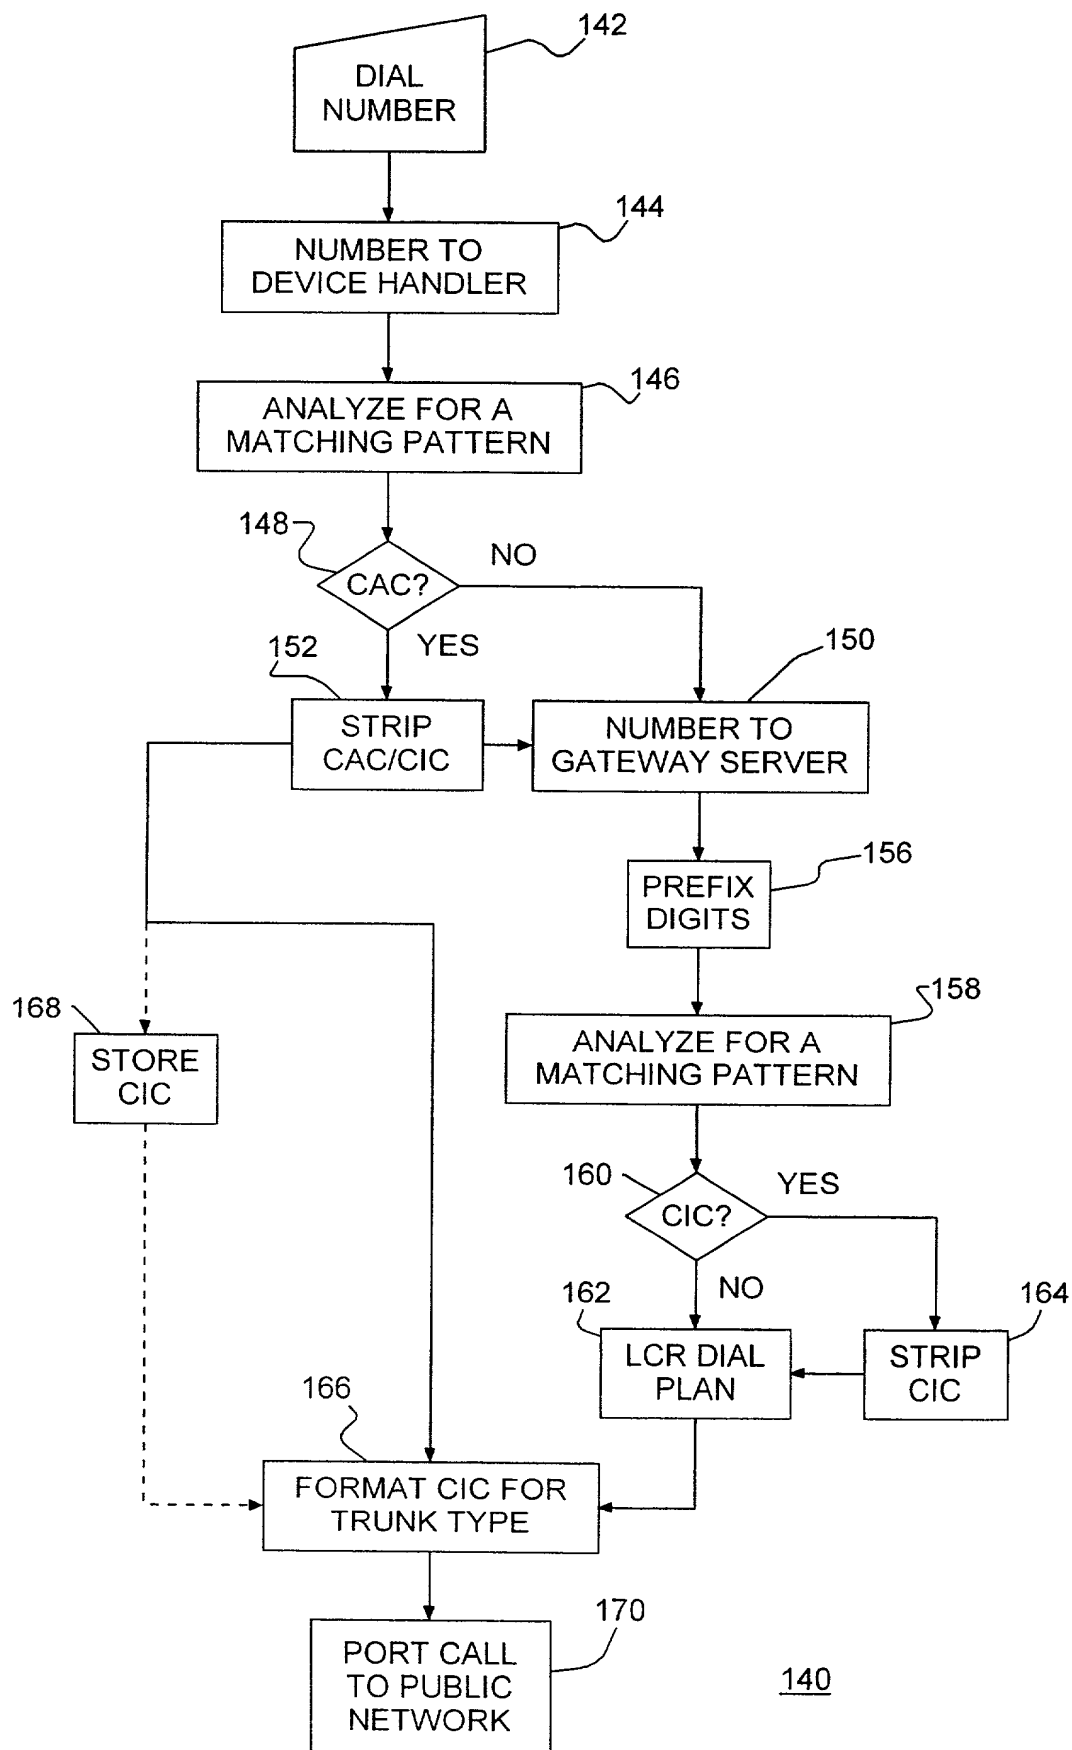


Fig. 2

200	Carrier-Identification-Code-Operations {iso(1) identified-organization(3) icd-ecma(0012) member-company(2) siemens-units(1107) etc(1)} DEFINITIONS EXPLICIT TAGS ::=
	BEGIN
	IMPORTS OPERATION, FROM Remote-Operation-Notation {joint-iso-ccitt(2) remote-operations(4) notation(0)}
	xyz OBJECT IDENTIFIER ::=
	{iso(1) identified-organization(3) icd-ecma(0012) member-company(2) siemens-units(1107) etc(1)}
202	--Carrier Identification Code privCIC ::= OPERATION
204	ARGUMENT CicArg ~ 204
204	CicArg ::= SEQUENCE {
	cic ~ 208 [0] IMPLICIT CIC ~ 210 OPTIONAL, ... --Ellipsis ~ 206
210	CIC ::= SEQUENCE {
	typeOfNwId TypeOfNwId, nwIdPlan NwIdPlan, nwIdentification NwIdentification
212	}
	-- Type of Network Identification typeOfNwIdMin INTEGER ::= 0 typeOfNwIdMax INTEGER ::= 7 TypeOfNwId ::= INTEGER {
	214 218 userSpecified (0), 220 nationalNwId (2), internationalNwId (3) } (typeOfNwIdMin .. typeOfNwIdMax) ~ 214
222	-- Network Identification Plan nwIdPlanMin INTEGER ::= 0 nwIdPlanMax INTEGER ::= 15 NwIdPlan ::= INTEGER {
	224 226 228 unknown (0), carrierIdentificationCode (1), 230 dataNwIdentificationCode (3) } (nwIdPlanMin .. nwIdPlanMax)
232	-- Network Identificaton nwIdentificationMin INTEGER ::= 1 nwIdentificationMax INTEGER ::= 32 NwIdentification ::= 1A5String (SIZE(nwIdentificationMin .. nwIdentificationMax))
	234 236
	privCIC PrivCIC ::=globalValue { xyz privCIC (nn) }
	END

Fig. 4